


# MIIPS-HD Specifications at a Glance

SLM Type	- 2D array, LCOS
Number of SLM pixels	- 792
Control Type	- Phase and Amplitude
Max Input Power / Pulse Energy	- up to 2W / 2mJ*
Throughput	- 45-65% (typ.)*

**Table.** Back-mirror types and operating ranges for Hamamatsu LCOS-SLM X10468.#

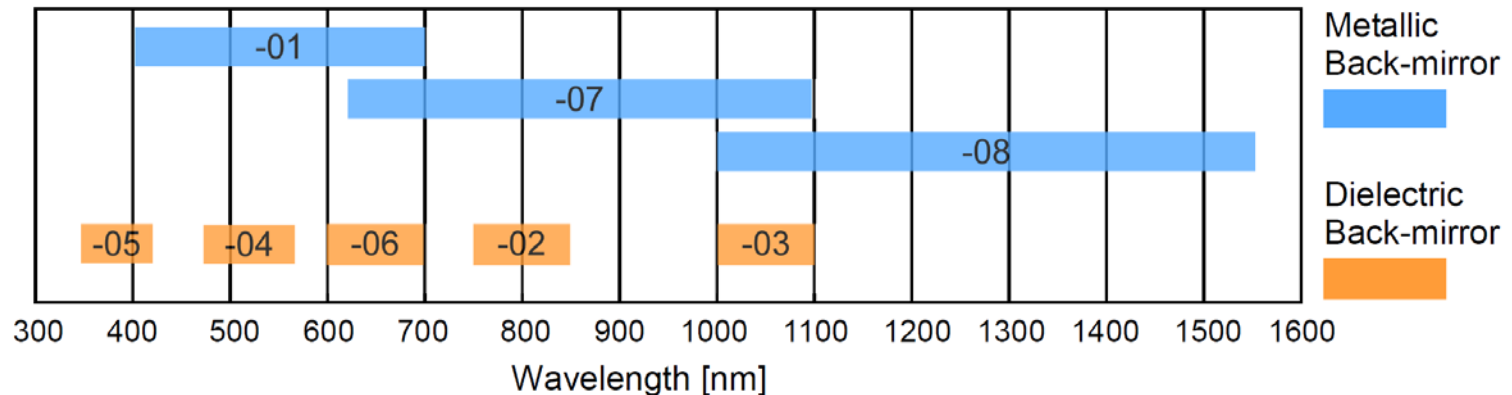

\* Depends on the SLM type and the shaper parameters;

# Max spectral window (passband) of the shaper is 200nm.