



System Specifications

SLM type	2D array, LCOS
Pixel pitch	20 μm
Number of pixels	792
Number of independent control channels [^]	~200
Operating wavelength range [*]	400 - 1550 nm
Spectral window ^{&}	up to 400 nm
Maximum input average power ^{&}	0.5-1.0 W
Maximum input pulse energy ^{&}	0.5-1.0 mJ
Recommended $1/e^2$ beam diameter	4 mm
Input polarization	linear, horizontal
Dimensions L x W x H	476 x 229 x 152 mm (18.75 x 9 x 6 in.)

Shaping of spectral phase and amplitude[#], independent of the laser repetition rate.


[^] Depends on the input beam size.

^{*} Several SLM types are available across the specified range; see the Table below for details.

[&] Depends on the back-mirror type and the center wavelength; customized to fit the laser source.

[#] Diffractive shaping mode is used to achieve the amplitude control.

Table. Back-mirror types and operating ranges for Hamamatsu LCOS-SLM X10468.

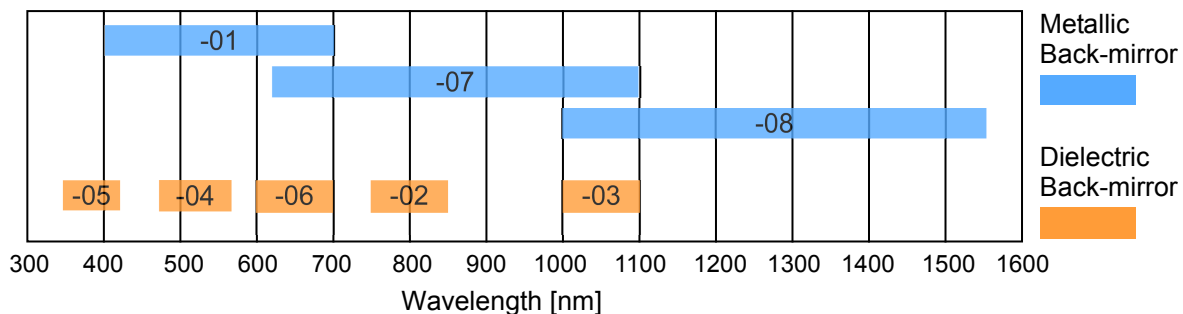

Copyright (c) 2016 Biophotonic Solutions Inc. Specifications may change without notice.